



# PSM0415 Series


**SMD Molded High Current Inductor**

Web:<http://www.dgpinzhan.com>

E-mail:[sale@dgpinzhan.com](mailto:sale@dgpinzhan.com)

Created	Checked	Type	Date	Version	Page
Tom	Justin	SMD	2018/9/5	A001	1

## 1. Dimensions: [mm]

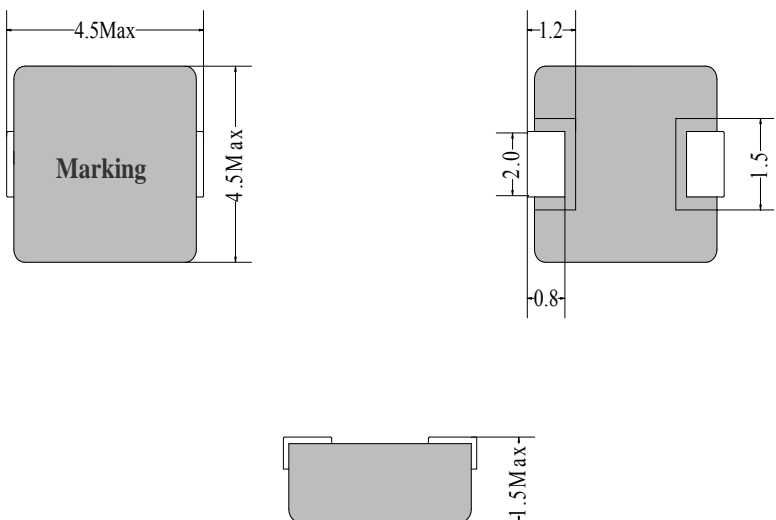

## 4. General Properties:

It is recommended that the temperature of the component does not exceed +125°C under worst case conditions


Ambient Temperature(referring to IR)	-40 °C up to +85 °C
Operating Temperature:	-40 °C up to +125 °C
Storage Temperature (in original packaging)	-20 °C up to +40 °C"75% RH Max

Test conditions of Electrical Properties: +20°C, 33% RH if not specified differently.if not specified differently

## 5. Electrical Properties:

Part Code	Inductance	Test condition	DC-Resistance	Heat Rating Current	Saturation current
PSM0415-R47N	0.47uH±30%	100KHZ/1V	27mΩ Max	5.0A Max	9.0A Max
PSM0415-1R0N	1.0uH±30%	100KHZ/1V	50mΩ Max	4.0A Max	7.0A Max
PSM0415-1R5N	1.5uH±30%	100KHZ/1V	63mΩ Max	4.0A Max	6.0A Max
PSM0415-2R2N	2.2uH±30%	100KHZ/1V	86mΩ Max	3.0A Max	4.0A Max
PSM0415-3R3N	3.3uH±30%	100KHZ/1V	145mΩ Max	2.0A Max	3.5A Max
PSM0415-4R7N	4.7uH±30%	100KHZ/1V	246mΩ Max	1.5A Max	3.0A Max

## 2. Schematic:



## 3. PCB Layout Ref(mm)

