



# PDRH73D Series

Double inductor with two identical windings

Web:<http://www.dgpinzhan.com>

E-mail:[sale@dgpinzhan.com](mailto:sale@dgpinzhan.com)

Created

Checked

Type

Date

Version

Page

Tom

Justin



DIP

2018/9/5

A001

1

## 1. Dimensions: [mm]

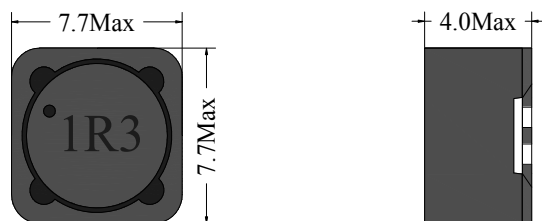

## 4. General Properties:

It is recommended that the temperature of the component does not exceed +125°C under worst case conditions.

Storage Temperature: -20 °C up to +60 °C

Operating Temperature: -40 °C up to +125 °C

Temperature Rise < 55K.


Test conditions of Electrical Properties: +20°C, 33% RH if not specified differently.

## 5. Electrical Properties:

Part Code	Inductance	Test condition	DC-Resistance	Rated Current	Saturation current
PDRH73D-1R3M	1.3uH ±20%	1KHZ/0. 25V	35mΩ Max	4. 4A Max	6. 3A Max
PDRH73D-2R4M	2.4uH ±20%	1KHZ/0. 25V	52mΩ Max	3. 6A Max	4. 8A Max
PDRH73D-3R3M	3.3uH ±20%	1KHZ/0. 25V	65mΩ Max	3. 3A Max	4. 0A Max
PDRH73D-4R7M	4.7uH ±20%	1KHZ/0. 25V	75mΩ Max	1. 3A Max	3. 0A Max
PDRH73D-5R6M	5.6uH ±20%	1KHZ/0. 25V	120mΩ Max	1. 5A Max	3. 0A Max
PDRH73D-6R8M	6.8uH ±20%	1KHZ/0. 25V	135mΩ Max	1. 2A Max	2. 5A Max
PDRH73D-8R2M	8.2uH ±20%	1KHZ/0. 25V	140mΩ Max	1. 3A Max	2. 7A Max
PDRH73D-100M	10uH ±20%	1KHZ/0. 25V	165mΩ Max	1. 0A Max	2. 0A Max
PDRH73D-220M	22uH ±20%	1KHZ/0. 25V	300mΩ Max	0. 7A Max	1. 5A Max
PDRH73D-470M	47uH ±20%	1KHZ/0. 25V	750mΩ Max	0. 9A Max	1. 0A Max
PDRH73D-101M	100uH ±20%	1KHZ/0. 25V	1.73Ω Max	0. 3A Max	0. 7A Max

Remarks: N1=N2

## 2. Schematic:



## 3. PCB Layout Ref(mm)

