



# P&Z ELECTRONICS CO.,LTD

ER2010 LED Power drive transformer

Web:<http://www.dgpinzhan.com>

E-mail:[sales@dgpinzhan.com](mailto:sales@dgpinzhan.com)

Part Code	Date	Production	Type	Version	Page
PZ-ER2010-801K	2013/8/23	Tom	DIP	A001	1

## 4.General Properties:

It is recommended that the temperature of the component does not exceed +125°C under worst case conditions.

Storage Temperature:	-20 °C up to +60 °C
----------------------	---------------------

Operating Temperature:	-40 °C up to +125 °C
------------------------	----------------------



Temperature Rise<55K.

Test conditions of Electrical Properties: +20°C, 33% RH if not specified differently.


## 5.Electrical Properties:

Properties	Test conditions	Value	Unit	Tolerance
Inductance:1-5	1KHZ/0.3V	800	uH	±10%
Leakage :1-5	10KHZ/0.3V other short	100	uH	Max
Turns ratio:	N2:N1	1:1		±1%
Turns ratio:	N3:N1	2.64:1		±1%
Hi-pot: Pri-Sec	AC1000V/3mA/3S		V/(AC)	Pass
Hi-pot: Pri/Sec-Core	AC500V/3mA/3S		V/(AC)	Pass

## 1.Dimensions: [mm]

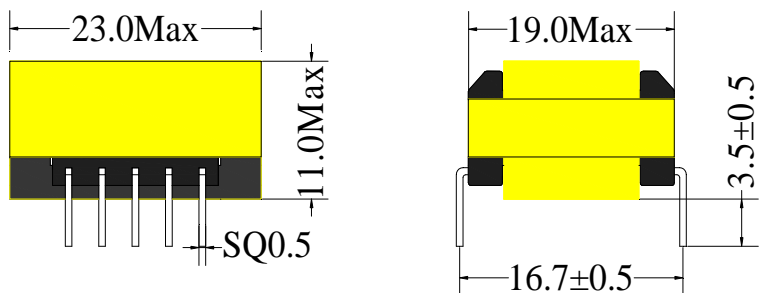

## 2.Schematic:

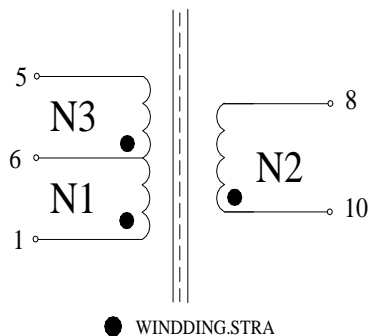

## 3.Winding construction:

