
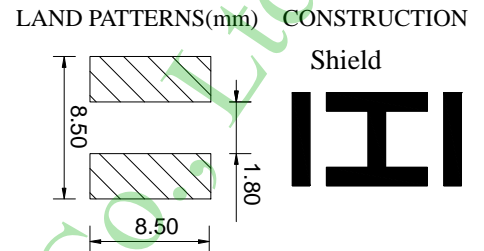
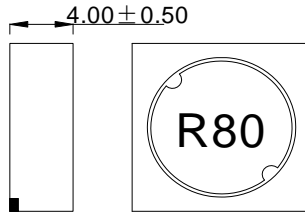



Inductance Range: 0.8μH~1000μH
Temperature Range: -40℃~+125℃

PDRA74-Series

DIMENSIONS(mm)



FEATURES:

- ★Quantity / Reel: 1000pcs
- ★High current & low DCR, Quadrate 7.3mm*7.3mm, Heigh 4.1mm Type.
- ★The use of carrier tape package for SMT reflow soldering process
- ★Widely use in DC-DC converter/LCD TV/Notebook/PDA/ Digital camera/DVD etc.
- ★Design to customer requirement

RoHS Compliant(SGS Certified Result)				
Pb	Cd	Cr+6	PBBs	PBDEs
<1000ppm	ND	ND	ND	ND

Electrical Characteristics:

Part Number	Test Condition	Inductance (μH)	Tolerance (%)	D.C.R(Ω) Max.	Rated Current(A)
PDRA74-R80N	100Hz/0.3V	0.8	±30	9m	8.80
PDRA74-1R0N	100Hz/0.3V	1.0	±30	10m	8.00
PDRA74-1R8N	100Hz/0.3V	1.8	±30	30m	7.20
PDRA74-2R2M	100Hz/0.3V	2.2	±20	30m	7.00
PDRA74-4R7M	100Hz/0.3V	4.7	±20	42m	2.05
PDRA74-100M	1KHz/0.3V	10	±20	49m	1.84
PDRA74-120M	1KHz/0.3V	12	±20	58m	1.71
PDRA74-150M	1KHz/0.3V	15	±20	81m	1.47
PDRA74-180M	1KHz/0.3V	18	±20	91m	1.31
PDRA74-220M	1KHz/0.3V	22	±20	0.110	1.23
PDRA74-270M	1KHz/0.3V	27	±20	0.150	1.12
PDRA74-330M	1KHz/0.3V	33	±20	0.170	0.96
PDRA74-390M	1KHz/0.3V	39	±20	0.230	0.91
PDRA74-470M	1KHz/0.3V	47	±20	0.260	0.88
PDRA74-560M	1KHz/0.3V	56	±20	0.350	0.75
PDRA74-680M	1KHz/0.3V	68	±20	0.380	0.69
PDRA74-820M	1KHz/0.3V	82	±20	0.430	0.61
PDRA74-101M	1KHz/0.3V	100	±20	0.610	0.60
PDRA74-121M	1KHz/0.3V	120	±20	0.660	0.52
PDRA74-151M	1KHz/0.3V	150	±20	0.880	0.46
PDRA74-181M	1KHz/0.3V	180	±20	0.980	0.42
PDRA74-221M	1KHz/0.3V	220	±20	1.170	0.36
PDRA74-271M	1KHz/0.3V	270	±20	1.640	0.34
PDRA74-331M	1KHz/0.3V	330	±20	1.860	0.32
PDRA74-391M	1KHz/0.3V	390	±20	2.850	0.29
PDRA74-471M	1KHz/0.3V	470	±20	3.010	0.26
PDRA74-561M	1KHz/0.3V	560	±20	3.620	0.23
PDRA74-681M	1KHz/0.3V	680	±20	4.630	0.22
PDRA74-821M	1KHz/0.3V	820	±20	5.200	0.20
PDRA74-102M	1KHz/0.3V	1000	±20	6.000	0.18

- 1、 Inductance is measured with a LCR meter:HP4284A & 3532-50 or equivalent.
- 2、 D.C .R is measured with a Digital Multimeter TH2512B or equivalent.
- 3、 Rated Current: The rated current is the current at which the inductance decreases by 35% from the initial value or the temperature rise is ΔT=40℃ ,whichever is smaller(Ta=20℃).